

FEATURES & SPECIFICATIONS

APPLICATION — The CLD Canopy light was designed to provide exceptional light levels for task oriented environments. The prismatic refractor allows for up light to avoid the "cave effect", while punching light down towards the work plane. The totally enclosed optics makes this fixture ideal for dirty and dusty environments.

CONSTRUCTION — The upper housing is made from die cast aluminum with a powder coat paint finish. The prismatic refractor is enclosed with a clear flat lens. ETL listed.

FINISH – A Super Durable Polyester powder coat finish is electrostatically applied in our state of the art paint facility. Standard colors available: Black, Bronze, US Green, White. Custom colors available upon request.

OPTICAL SYSTEM - Multi-patterned prismatic refractor provides 360° illumination.

ELECTRICAL SYSTEM —Available in 50W thru 175W standard metal halide, pulse-start metal halide, and high pressure sodium. Comes standard with a 4KV pulse rated mogul base socket. Each 60HZ CWA multi-tap¹ or 480V ballast is pre-wired and installed for convenience.

MOUNTING – Housing is equipped with two side conduit entries and one top conduit entry. A mounting plate is provided for direct mounting to a standard 4" junction box.




Catalog Number

Project

ORDERING INFORMATION

Choose the bold face options for the appropriate luminaire configuration for your application and enter on the line above each fixture attribute. Accessories may be factory installed, depending on the particular accessory chosen, but still be ordered as a separate line item.

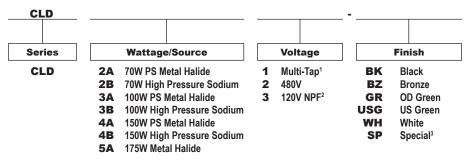

NOTES

Example: CLD5A1-BZ

- 1 Multi-Tap is 120/208/240/277V wired 277V.
- 2 120V NPF option is for High Pressure Sodium Models only.
- 3 Custom RAL color matching is available. Contact your Techlight sale representative for additional information.

www.techlightusa.com

Туре