



DRILLED PER FIXTURE REQUIREMENTS:


DM1-DRILLED FOR 1 FIXTURE

DM290 -DM2180-DRILLED FOR 2 FIXTURES AT 90° OR 180°

DM390-DM3120-DRILLED FOR 3 FIXTURES AT 90° OR 120°

D490-DRILLED FOR 4 FIXTURES

POLE DIA




3X5 HAND HOLE
STD SIDE A

DRILLED MOUNT OPTIONS

Drilling Locations

Sides	A	B	C	D
Hand Hole	X			
DM1	X			
DM290	X	X		
DM2180		X		X
DM390	X	X		X
DM490	X	X	X	X

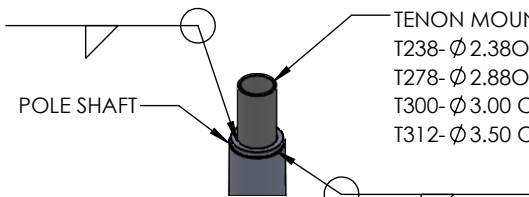

TENON MOUNT OPTIONS

TENON MOUNT OPTIONS:

T238-Ø 2.38OD X 4.00 LG


T278-Ø 2.88OD X 4.00 LG

T300-Ø 3.00 OD X 6.00 LG


T312-Ø 3.50 OD X 6.00 LG

POLE HEIGHT


TLGFIA STD MNT
12" ABOVE HH



TLGFIA STD MOUNT

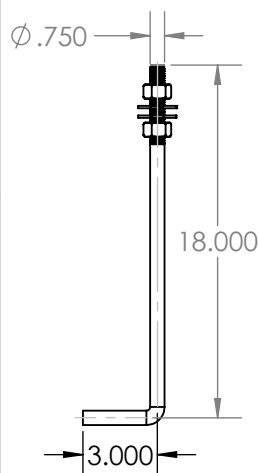

Ø0.75 x 18.00 ANCHOR BOLT
AB KIT REQ'D KAB3418G08R

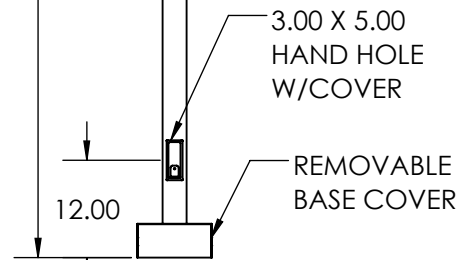

POLE DETAIL

SOLIDWORKS DRAWING

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES

DECIMALS
X.X = ±0.030
X.XX = ±0.010
X.XXX = ±0.005
X.XXXX = ±0.0005
FRACTION = ±1/32

ANGLE
X.X = ±1.0°
X.XX = ±0.5°

SURFACE 125/
FINISH

FINISH

PAINT TO ORDER

MATERIAL #:

STEEL

MATERIAL:

MATERIAL SIZE:

POLE SPECIFICATIONS RSP25-4-11

NO.	COMPONENT	ASTM SPEC	MIN. YIELD (PSI)			
1	POLE SHAFT	A500 GR C	50,000			
2	BASE PLATE	A36	36,000			
3	ANCHOR BOLTS	F1554 GR 55	55,000			
4	ANCHOR BOLT HDW	A153	---			

FINISH SPECIFICATIONS

IF GALV FINISH OPTION IS SPECIFIED POLE WILL BE HOT DIP GALVANIZED

PER ASTM A123 SPECIFICATIONS. IF GALV FINISH OPTION IS SPECIFIED

POLE WILL BE HOT DIP GALVANIZED PER ASTM A123, THEN POWDER COATED

WITH TEXTURED POLYESTER POWDER COAT ELECTROSTATICALLY APPLIED.

IF POLYESTER POWDER COAT PAINT FINISH IS SPECIFIED POLE WILL BE SHOT

BLASTED, WASHED, PRETREATED & DRIED THEN POWDER COAT WILL BE

ELECTROSTATICALLY APPLIED PER AAMA 2604/2605 SPECIFICATIONS.

POLE DIMENSIONS

POLE HGT. (FT)	POLE DIA (IN)	STL GA				
25.0'	4.00"	11 (.119)				

BASE PLATE DIMENSIONS

BOLT CIRCLE DIA. (IN)	BASE PLATE (IN)	A/B HOLE WD (IN)	BASE PLATE THK (IN)			
SQR4 7.25-8.75"	8.00 SQ	1.00"	0.75"			

ANCHOR BOLT DIMENSIONS


ANCHOR BOLT DIA (IN)	ANCHOR BOLT LENGTH (IN)					
0.75"	18.00"					

ALLOWABLE WIND LOAD (SQ. FT)

WIND	INDICATED EPA	100 MPH	110MPH	120MPH	130MPH	140MPH
EPA	---	2.8	1.6	0.7	N/A	N/A



3.00 X 5.00 HAND HOLE COVER 8.00 X 8.00 X .75 THK BASE PLATE



DESIGN PRM	DATE 6.3.26
DRAWN PRM	DATE 6.3.26
CHECKED	DATE
APPROVED	DATE

SOLIDWORKS DRAWING

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES

DECIMALS
X.X = ±0.030
X.XX = ±0.010
X.XXX = ±0.005
X.XXXX = ±0.0005
FRACTION = ±1/32

ANGLE
X.X = ±1.0°
X.XX = ±0.5°

SURFACE 125/
FINISH

FINISH

PAINT TO ORDER

MATERIAL #:

STEEL

MATERIAL:

MATERIAL SIZE:

TECHLIGHT®

WWW.TECHLIGHT.COM

THE INFORMATION CONTAINED IN THIS DRAWING
IS THE SOLE PROPERTY OF TECHLIGHTUSA.
ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE
WRITTEN PERMISSION OF TECHLIGHTUSA IS PROHIBITED.

DESCRIPTION

RSP 25 4 11

MASS PROPERTIES	SURFACE AREA	VOLUME	WEIGHT
DENSITY			
lbs/cu.in.	sq.in.	cu.in.	lbs
AMOUNT OF PAINT	PART NO.		REV.
lbs	A	RSP 25 4 11	-
DO NOT SCALE DRAWING	SCALE 1:96	CAD FILE RTP20 Assy	SHEET 1 OF 2

