




DRILLED PER FIXTURE REQUIREMENTS:
DM1-DRILLED FOR 1 FIXTURE
DM290 -DM2180-DRILLED FOR 2 FIXTURES AT 90° OR 180°
DM390-DM3120-DRILLED FOR 3 FIXTURES AT 90° OR 120°
D490-DRILLED FOR 4 FIXTURES




3X5 HAND HOLE
STD SIDE A

DRILLED MOUNT OPTIONS


Drilling Locations

Sides	A	B	C	D
Hand Hole	X			
DM1	X			
DM290	X	X		
DM2180		X		X
DM390	X	X		X
DM490	X	X	X	X

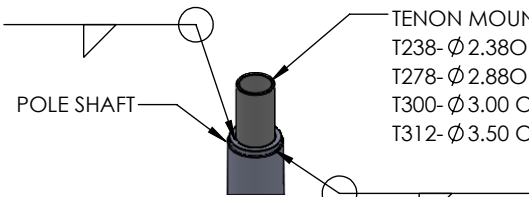


TENON MOUNT OPTIONS:
T238-Ø 2.38OD X 4.00 LG
T278-Ø 2.88OD X 4.00 LG
T300-Ø 3.00 OD X 6.00 LG
T312-Ø 3.50 OD X 6.00 LG


TENON MOUNT OPTIONS

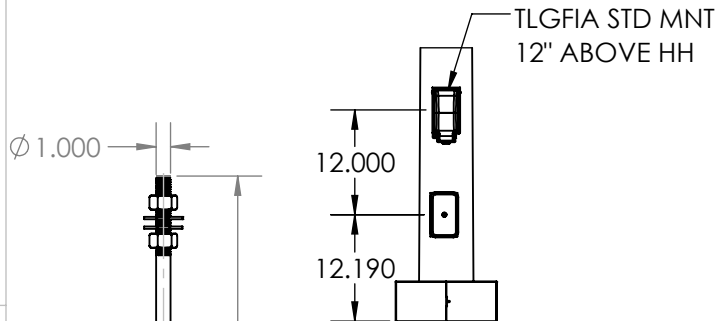

TLGFA STD MOUNT

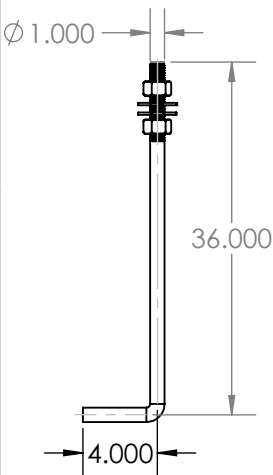

Ø 1.00 x 36.00 ANCHOR BOLT
AB KIT REQ'D KAB136G13R

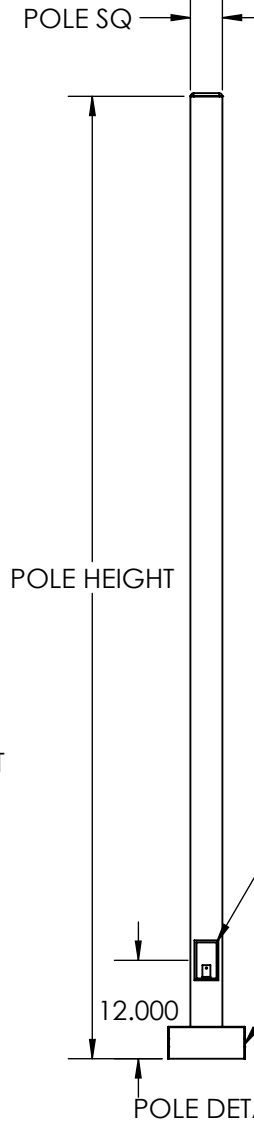

POLE DETAIL


POLE SPECIFICATIONS SSP30-6-7						
NO.	COMPONENT	ASTM SPEC	MIN. YIELD (PSI)			
1	POLE SHAFT	A500 GR C	50,000			
2	BASE PLATE	A36	36,000			
3	ANCHOR BOLTS	F1554 GR 55	55,000			
4	ANCHOR BOLT HDW	A153	---			
FINISH SPECIFICATIONS						
IF GALV FINISH OPTION IS SPECIFIED POLE WILL BE HOT DIP GALVANIZED						
PER ASTM A123 SPECIFICATIONS. IF GALVP FINISH OPTION IS SPECIFIED						
POLE WILL BE HOT DIP GALVANIZED PER ASTM A123, THEN POWDER COATED						
WITH TEXTURED POLYESTER POWDER COAT ELECTROSTATICALLY APPLIED.						
IF POLYESTER POWDER COAT PAINT FINISH IS SPECIFIED POLE WILL BE SHOT						
BLASTED, WASHED, PRETREATED & DRIED THEN POWDER COAT WILL BE						
ELECTROSTATICALLY APPLIED PER AAMA 2604/2605 SPECIFICATIONS.						
POLE DIMENSIONS						
POLE HGT. (FT)		POLE DIA (IN)	STL GA			
	30.0 '	6.00"	7 (.188)			
BASE PLATE DIMENSIONS						
BOLT CIRCLE DIA. (IN)		BASE PLATE (IN)	A/B HOLE WD (IN)	BASE PLATE THK (IN)		
P613125	12.00-14.00"	13.00 SQ	1.38"	1.25"		
ANCHOR BOLT DIMENSIONS						
ANCHOR BOLT DIA (IN)		ANCHOR BOLT LENGTH (IN)				
	1.00"	36.00"				
ALLOWABLE WIND LOAD (SQ. FT)						
WIND	INDICATED EPA	100 MPH	110MPH	120MPH	130MPH	140MPH
EPA	---	13.1	9.1	6.1	3.8	1.9

3.00 X 5.00
HAND HOLE
W/COVER

REMOVABLE
BASE COVER



3.00 X 5.00 HAND HOLE COVER



13.00 X 13.00 X 1.25 THK BASE PLATE

DESIGN	DATE
PRM	7.13.26
DRAWN	DATE
PRM	7.13.26
CHECKED	DATE
APPROVED	DATE

SOLIDWORKS DRAWING

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES

DECIMALS	ANGLE
X.X = ±0.030	X.X = ±1.0°
X.XX = ±0.010	X.XX = ±0.5°
X.XXX = ±0.005	
X.XXXX = ±0.0005	
FRACTION = ±1/32	




PAINT TO ORDER

MATERIAL #:	STEEL
MATERIAL:	
MATERIAL SIZE:	

TECHLIGHT®
WWW.TECHLIGHT.COM

THE INFORMATION CONTAINED IN THIS DRAWING
IS THE SOLE PROPERTY OF TECHLIGHTUSA.
ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE
WRITTEN PERMISSION OF TECHLIGHTUSA IS PROHIBITED.

DESCRIPTION			
SSP 30 6 7			
MASS PROPERTIES	SURFACE AREA		WEIGHT
DENSITY	sq.in.	cu.in.	lbs
AMOUNT OF PAINT	PART NO.	SSP 30 6 7	
DO NOT SCALE DRAWING	SCALE	CAD FILE	SHEET
	1:96	RTP20 Assy	1 OF 2

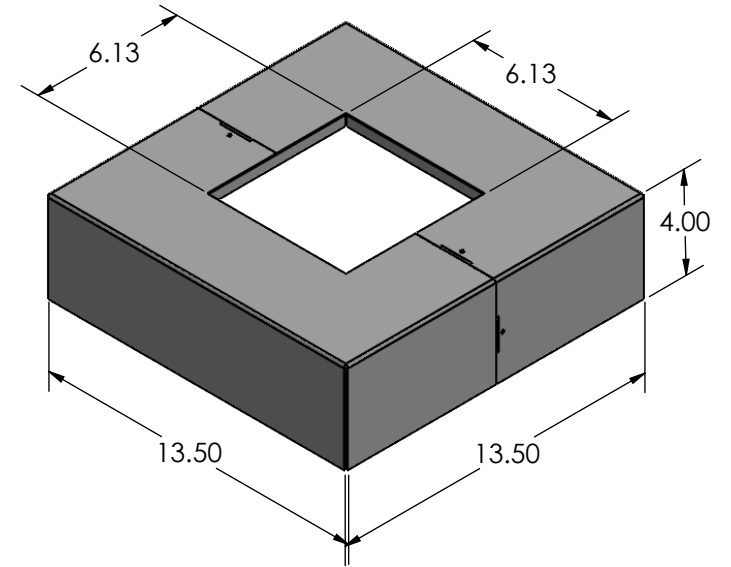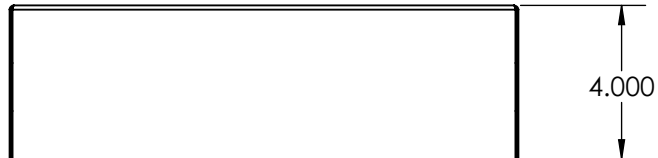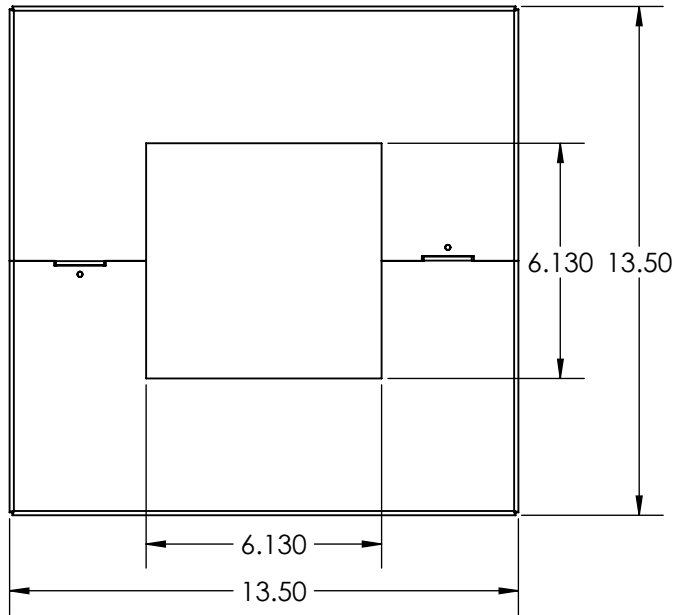

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
WWW.TECHLIGHTUSA.COM ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
WWW.TECHLIGHTUSA.COM IS
PROHIBITED.

		DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL ± ANGULAR: MACH ± BEND ± TWO PLACE DECIMAL ± THREE PLACE DECIMAL ±		NAME	DATE	TECHLIGHT.COM			
				CREATED		7.13.26	P6BCP		
				CHECKED					
				ENG APPR.					
				MFG APPR.					
		MATERIAL	ABS	Q.A.			P6BCP		
		FINISH		CONFIGURATION					
NEXT ASSY	USED ON	COLOR TO MATCH							
APPLICATION		DO NOT SCALE DRAWING							
						SIZE	DWG. NO.	REV.	
						A	P6BCP		
						SCALE:1:8	WEIGHT:	SHEET 2 OF 2	