



TECHLIGHT
INNOVATION IN ILLUMINATION

Catalog Number

Project

Type

FEATURES & SPECIFICATIONS

APPLICATION — The TLMPL and TLLMPL Path Lights feature the elegant look of an offset mushroom top. The wide selection of finishes available allows this fixture to subtly blend into any landscape or lawn design. This is perfect for pathways and outdoor landscape projects. These path lights enhance security and ambience while adding excellent curb appeal to your next project. Our pathway lighting solutions offer flexibility and customization options to suit your unique style and preferences. Cast Brass versions are available for harsh environments.

CONSTRUCTION — Constructed of die cast aluminum or brass. A chromate pretreatment is applied prior to the finishing process to ensure lasting durability. Lamp not Included. LED lamps should be ordered separately, see accessories section.

OPTICAL SYSTEM — A high performance 120° optical assembly in conjunction with the light source reflects the light off of the dome reflector back down and outwards for 360° illumination. This also keeps the light source completely shielded from view in all directions to exceed full cut-off requirements, while keeping light pollution to an absolute minimum.

MOUNTING — Comes standard with a 12" or 18" tall, ½" NPT stem and mounting stake. Provided with a 3' long 18 ga. whip and low voltage connector.

TL-MPL SERIES

Offset Mushroom Top Area/Path Light



FINISH — A Super Durable Polyester powder coat finish is electrostatically applied. Standard colors available: Black, Bronze, White, OD Green, Verde. Custom colors available upon request.

ORDERING INFORMATION

Choose the bold face options for the appropriate luminaire configuration for your application and enter on the line above each fixture attribute. Accessories may be factory installed, depending on the particular accessory chosen, but still be ordered as a separate line item.


EXAMPLE:

TL-MPL 18 BR

SERIES	STEM LENGTH	CASTING	FINISH
TL-MPL = 6" TOP	18 = 18" Stem (TL-MPL, 6" Top, only)	BR = BrassCasting	BK = Black
TLL-MPL = 9" TOP	Blank = 12" Stem (Standard for 6" Top) 18" Stem (Standard for 9" Top)	Blank = AluminumCasting	BZ = Bronze
			GR = OD Green
			WH = White
			SP = Special
			VRD = Verde



FIXTURE DIMENSIONS

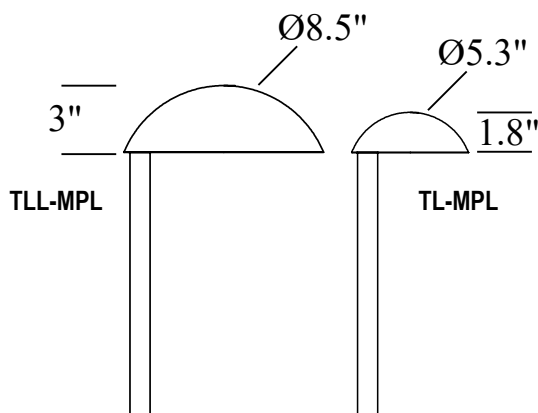

ACCESSORIES (Order as separate line items)

(See components section on the website for more transformer options)

LSSEB01 150W Transformer
LMSEB02 300W Transformer



SMSB 12" x 1" Mounting Stake (Brass)
MMSB 18" x 1" Mounting Stake (Brass)
LMSB 20" x 2.5" Mounting Stake (Brass)



PWW122LV 12 Gauge Low Voltage Cable
PWW102LV 10 Gauge Low Voltage Cable



TLHB800RCH Digital Timer



103137 LMP Led 4W BA155 12V 30K 90 CRI Clear



www.techlight.com

All dimensions and specifications are subject to change without notice.

REV: 20230629-02