



Catalog Number	
Project	Type

Features & Specifications

Application

Wall/Vanity fixtures are useful for illuminating corridors, stairwells, lavatories, dressing rooms, patient rooms, utility/area, and task lighting.

Features

Optimized for T8 or T5 lamp performance. To direct illumination up or down, fixture is equipped with a matching metal front. Baffles and dividers are available for up, down, and/or front light.

Construction

Housing constructed of structurally embossed, heavy gauge, cold rolled steel with with smooth white lens.

Electrical System

ETL listed. Suitable for damp locations. Damp location emergency pack must be specified separately. Ballasts are solid-state electronic. Ballasts and lamp holders are replaceable without removing from wall.


Finish

All reflective surfaces are finished with a high reflectance, lighting fixture white polyester powder.

WV207 SERIES WALL / VANITY 207



DIMENSIONS

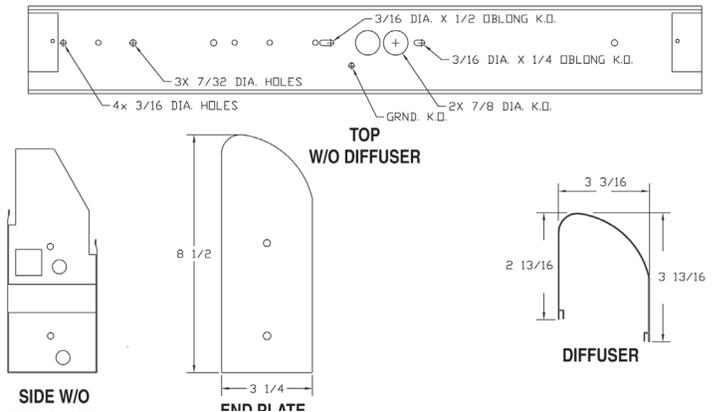

Please contact your Horizon Sales Representative for more information.
All dimensions subject to change without notice.

Ordering Nomenclature

Ex: (Wall Vanity 207, 1 Lamp, F32T8, 48", White finish, Multi-Volt = WV20713248SWDW)

--	--	--	--	--	--	--	--	--

SERIES	NUMBER OF LAMPS	WATTAGE	LENGTH	DIFFUSER	VOLTAGE	FINISH	BALLAST FACTOR	OPTIONS
WV207	1	15 - 15 watt T8 (18")	18 - 18"	SW-Smooth	D - Multi-Volt	W - White	10RS - ≤10% THD, Rapid Start	
	2	17 - 17 watt T8 (24")	24 - 24"	White	1 - 120V	C - Chrome	P - Program Start	
		32 - 32 watt T8 (48")	48 - 48"		2 - 277V		ZO - ≤20% THD	
		28T8 - 28 watt T8 (48")			3 - 347V		EB5 - 500 Lumen Emergency Ballast	
		*CFL - SPECIAL ORDER			4 - 480V		EB7 - 700 Lumen Emergency Ballast	
							EB14 - 1400 Lumen Emergency Ballast	
							EB30 - 3000 Lumen Emergency Ballast	
							FBF - Fast-Blow Fuse	
							SBF - Slow-Blow Fuse	
							PC - Pull Chain	
							PC3 - 3 Step Pull Chain	
							RS - Rocker Switch	
							CO - Convenience Outlet	
							CO2 - GFCI Convenience Outlet	